HI SHARP
ELECTRONICS CO., LTD.
SECURITY INTELLIGENCE

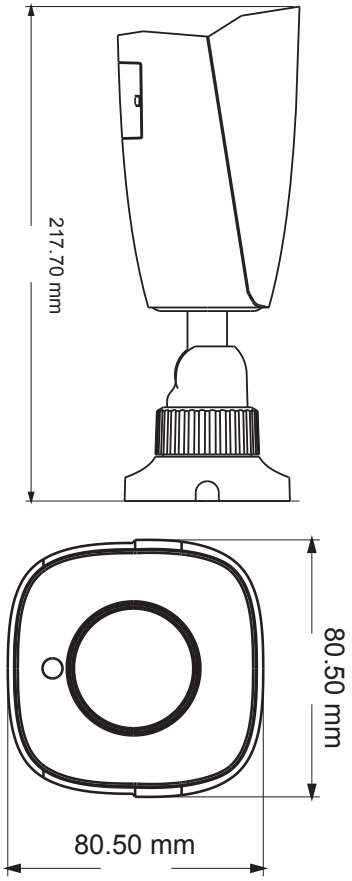

IP CAMERA

HS-T058SM-G

- H.265 / H.264
- 4MP (2560 × 1440)
- 30 ~ 50 M IR night view distance
- 3D DNR, DWDR, HLC, BLC, Digital Defog
- ICR auto switch, true day / night
- Built-in micro SD card slot, up to 128GB
- Support ROI coding
- Support three streams
- IP67 ingress protection
- Intelligent analytics: Object removal (object left/missing detection), scene change and video blur detection, intrusion and line crossing

RoHS CE FC

Address: No.673, Changxing Rd., Bade Dist., Taoyuan City, Taiwan
Website: www.hisharp.com | E-Mail：sales@hisharp.com.tw
Tel: +886-3-3653121 | Fax: +886-3-3681482

HI SHARP
ELECTRONICS CO., LTD.

4MP IP IR WATER-PROOF BULLET CAMERA

Camera			
Image Sensor	1 / 2.7 " CMOS		
Image Resolution	2560 × 1440		
Electronic Shutter	1 s ~ 1 / 100000 s		
Min. Illumination	0.011 lux @F1.2, AGC ON; 0 lux with IR 0.04 lux @ F2.2, AGC ON; 0 lux with IR		
Lens	EVF 2.8 ~ 12 mm @F1.4		
FOV	Horizontal	Vertical	Diagonal
	94° ~35.7°	62.2° ~20.5°	101.7° ~40.6°
Lens Mount	Ø14		
IR Distance	30~50 m		
WDR	Digital WDR		
Day & Night	ICR auto switch		
BLC	YES		
HLC	YES		
Digital Defog	YES		
Digital DNR	3D DNR		
Angle Adjustment	Pan: 0° ~360° ; Tilt:0° ~90° ;Rotation: 0° ~360°		
Image			
Video Compression	H.265 / H.264		
H.264 Compression Standard	Main Profile @Leve4.1 High Tier		
Resolution	4MP (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 1080),720P (1280 × 720), D1, CIF, 480 × 240		
Main Stream (S1)	60Hz : 4MP/3MP/1080P @30fps 50Hz : 4MP/3MP/1080P @25fps		
Sub Stream (S2)	60Hz : 720P @15fps , D1 / CIF @30fps 50Hz : 720P @12fps , D1 / CIF @25fps		
Third Stream (S3)	60Hz : D1 / CIF / 480 × 240 @30fps 50Hz : D1 / CIF / 480 × 240 @25fps		
Bit Rate	64 Kbps ~ 5 Mbps		
Bit Rate Type	VBR / CBR		
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness ,NR,etc. adjustable through client software or web browser		
ROI	Each ROI to be configured separately		
Audio			
Audio Compression	-		
Two-way audio	-		
Interfaces			
Network	RJ45		
Video Output	-		
Audio line in	-		
Audio line out	-		
Alarm Input	-		
Alarm Output	-		
Storage			
SD card	Built-in micro SD card slot; up to 128GB		
Network remote storage	YES		
Hardware Reset	YES		

HS-T058SM-G

Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPs, QoS
Interface Protocol	ONVIF
Smart Alarm	Motion detection; SD card full; SD card error
Intelligent Analytics	Object removal (object left/missing detection), scene change and video blur detection, intrusion and line crossing
General function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE	YES
Others	
Power Supply	DC12V / PoE
Power Consumption	< 9W
Operating Environment	- 30 ° C ~ 60 ° C (-22° F~140° F) Humidity: less than 95 % (non-condensing)
Dimensions	80.5 × 80.5 × 217.7 mm
Weight	Approx. 650g
Installation	Ceiling mounting ; Wall mounting
Ingress Protection	IP67

Accessories

B627 B640 B639

B615 B616 B628